


DIMMERS

paladin 873 010 rlc

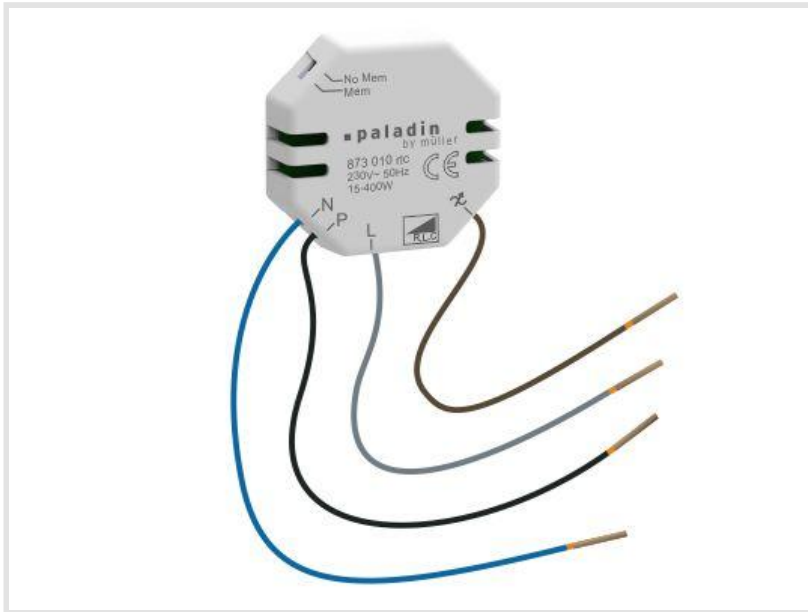

Overview

- Universal dimmer for R,L,C loads (15 - 400 W)
- Flush-mounted fitting
- For leading or trailing edge dimming.
- Automatic detection of the load type.
- Suitable for incandescent and halogen lamps
- Even suitable for electronic transformers
- For pushbuttons
- Installation in standard boxes behind a pushbutton possible
- Small design (13 mm)
- Easy to connect
- Memoryfunction of the last dimming value
- Softstart function
- Protection against overload, short circuit and overheat
- Easy to connect (10 cm litz wires with ferrules)

Order numbers

■ **paladin**

873 010 rlc for RLC loads:
15 - 400 W

DIMMERS

paladin 873 010 rlc

Order information

	Voltage	EAN	Art. No.
873 010 rlc	230 V 50 Hz	4022709231369	23136

Technical data

Supply voltage	230 V, 50 Hz
Power consumption	2 VA
Dimensions	46 x 42 x 13 mm
Mounting	Flush-mounting
Permitted ambient temperature	0...+40 °C
Type of protection	IP 20 to DIN EN 60529
Type of lamps	incandescent lamps halogen lamps
Glow lamp load	max. 1 mA
Types of load	R, L, C
230 V~ Incandescent lamps (R)	15–400 W
230 V~ HV-Halogen lamps (R)	15–400 W
Ferromagnetic transformers for LV-halogen lamps (L)	20–250 W
Electronic transformers for LV-halogen lamps (L) Leading Edge	15–400 W
Electronic transformers for LV-halogen lamps (C) Trailing Edge	15–400 W

Rights to technical amendments reserved / Technische Änderungen vorbehalten
Droits de modifications techniques réservés / Suscettibile di errori e modifiche

