

switching controlling counting



## Product overview

Our portfolio at a glance

SAVE TIME

ILLUMINATE

FEEL WELL

SMART HOME

KNX



We are here for you

P +49 7720 8083 6

E [info@hugo-mueller.de](mailto:info@hugo-mueller.de)

[www.hugo-mueller.de](http://www.hugo-mueller.de)



Family tradition since 1929

## Müller stands for innovation and quality

Hugo Müller founded the company "Omega-Müller" in 1929. Rooted in the industrial town of Schwenningen, Baden-Württemberg, the company began its journey with loudspeakers, headphones, and radio assembly kits.

In 1978, Hugo Müller made the transition to software-based products: the first time switch capable of being programmed for a year was introduced to the market. Its success was also virtually pre-programmed - the new product was exceptionally well received.

Today, in addition to intelligent time and light controls, our portfolio also includes room climate controllers, sensors and devices for building automation.

Our goal for the future is to continuously optimize and expand the range of our standard products and to provide completely individual solutions for OEM products.

All **■ müller** products are manufactured  
in our company in Baden-Württemberg -  
100% Made in Germany



Stronger together

## Your partner for OEM

Hugo Müller is your partner whenever you need a customized electro-technical product. We manage the transition from your wishes and vague specifications to well-designed serial products.

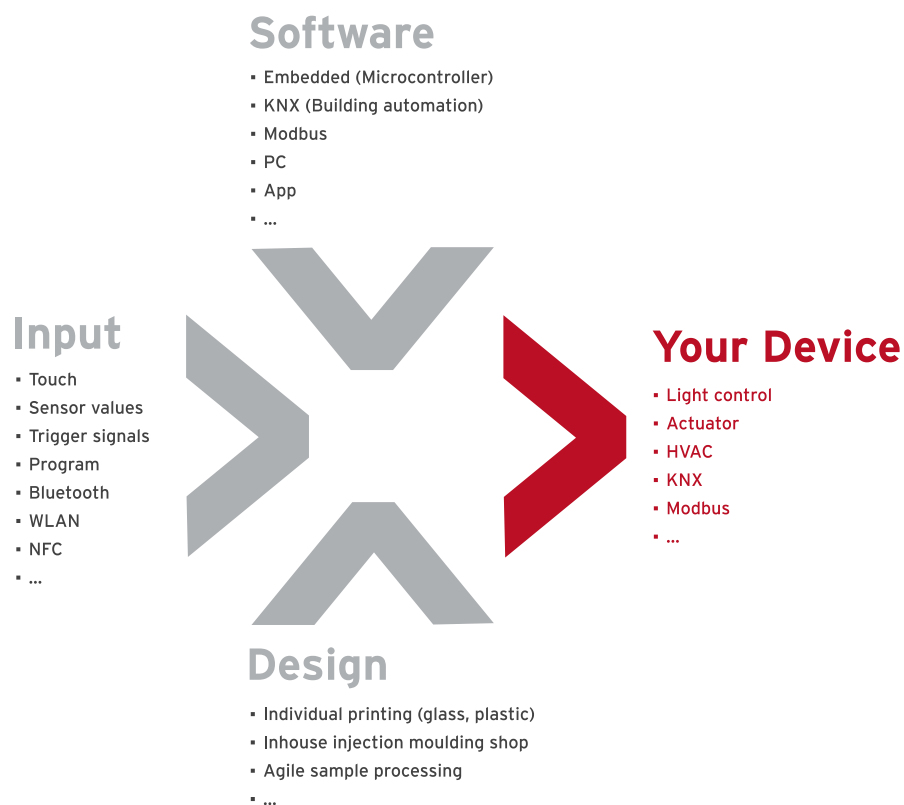
We turn your requirements into products ready for sale and offer all relevant tasks: from hardware and software development to prototypes and serial production.

All around the world, we make our partner highly satisfied with our OEM products and we want to continue to use our expertise to meet your requirements and fulfil your wishes.






For us, being your OEM partner means accepting full responsibility and to act accordingly. We want to understand the customer's point of view, by knowing the market requirements, followed by generating ideas and innovations, and finally developing, designing, and manufacturing products. We want to work hand in hand with you to achieve the best possible result.

We aim for long-term and personal partnerships with our customers. You can rely on high-quality results, an open approach, the highest quality "Made in Germany" and comprehensive service.

If you are looking for customized OEM solutions, you have come to the right partner.



## Product overview

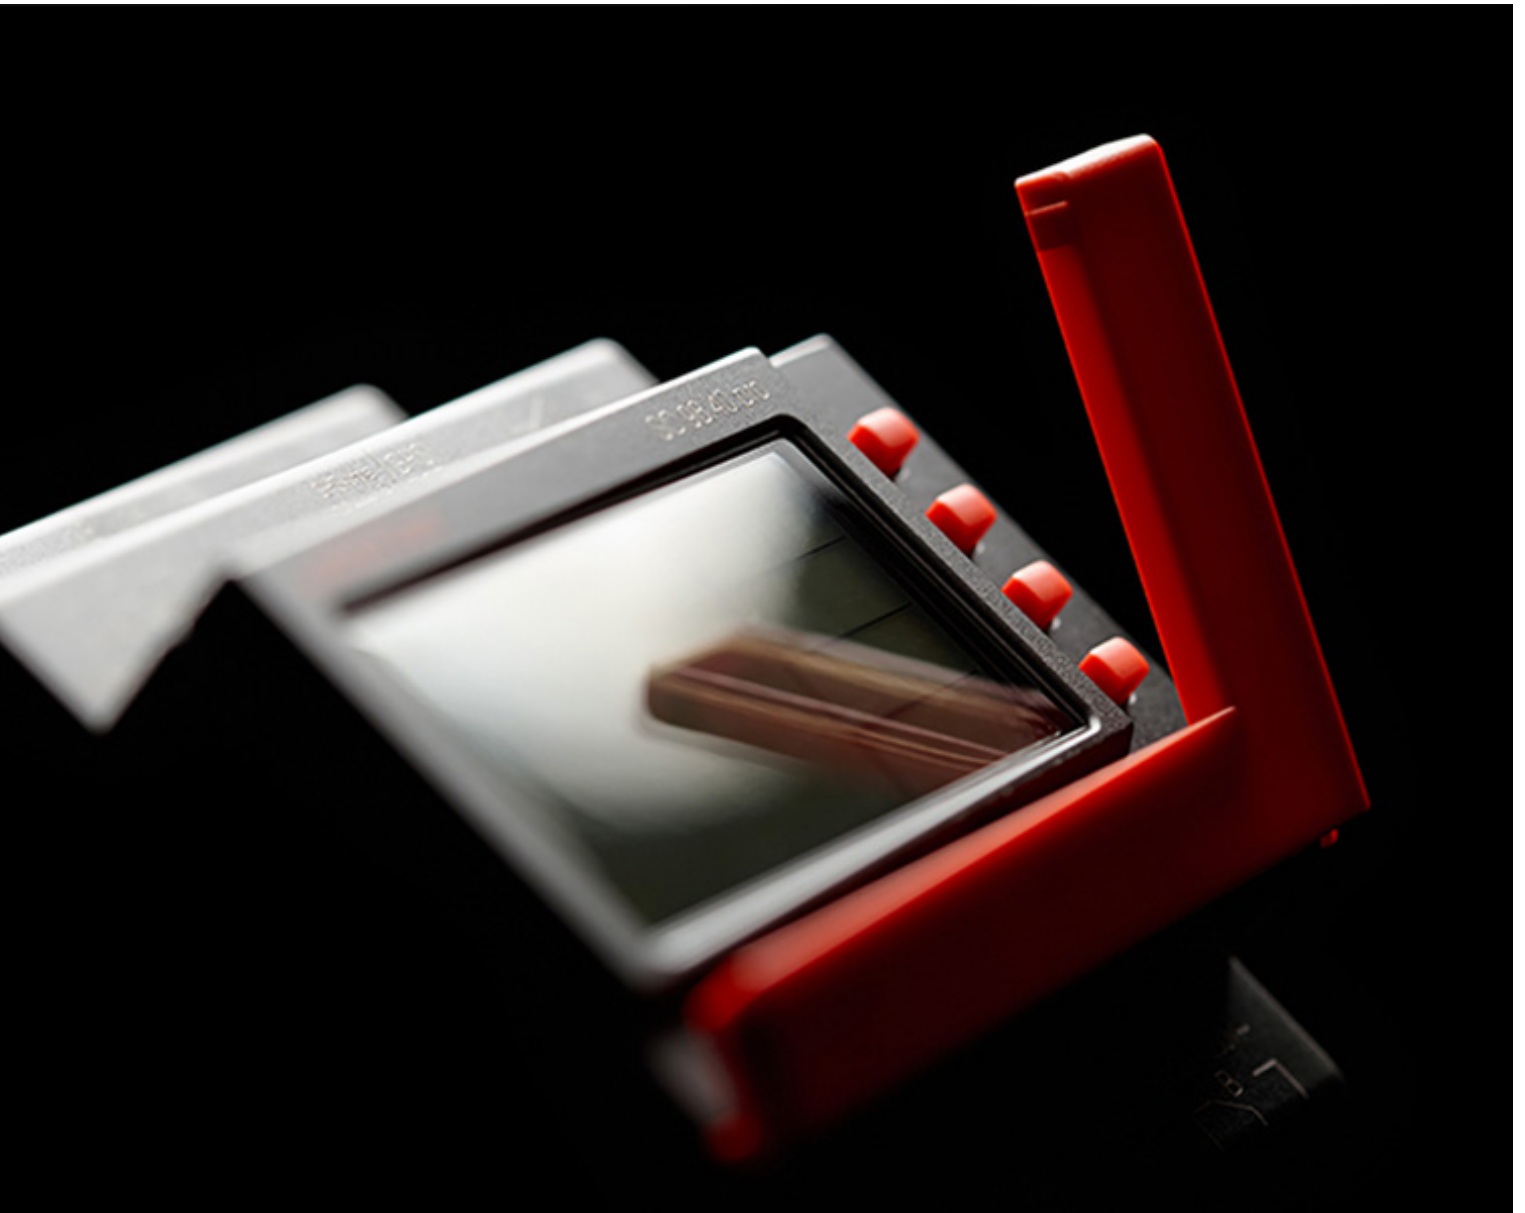
 SAVE TIME	Digital time switches week	Page 8
	Digital time switches astro	Page 9
	Digital time switches year	Page 9
	Masterclocks	Page 10
	Analogue time switches	Page 11
	Blind controllers	Page 11
	Elapsed time counters	Page 12
	Count down timers / Relays	Page 12
	Accessories	Page 13
 ILLUMINATE	Staircase lighting timers	Page 16
	Twilight switches	Page 16
	Dimmers	Page 16
	Astro dimmers	Page 17
	Smart bluetooth dimmers	Page 17
 FEEL WELL	Modbus sensors	Page 19
	0-10 V sensors	Page 19
	Air quality sensors / CO <sub>2</sub> -monitor	Page 19
 SMART HOME	mi.puck switches	Page 21
	mi.puck dimmers	Page 21
	mi.puck accessories	Page 21
 KNX	KNX room temperature controllers	Page 24
	KNX humidity controllers	Page 24
	KNX air quality controllers	Page 25
	KNX push-button sensors 2-fold	Page 26
	KNX push-button sensors 4-fold	Page 26
	KNX push-button sensors 4-fold with icons	Page 26
	KNX push-button sensors 6-fold	Page 27
	KNX push-button sensors 6-fold with icons	Page 27
	KNX Multi sensors wall & coridor	Page 28
	KNX Multi sensors ceiling	Page 28
	KNX outdoor sensors	Page 28
	KNX audio interfaces	Page 29
	Further KNX-TP products	Page 29
	KNX-RF switching actuators	Page 30
	KNX-RF dimmers	Page 30
	KNX-RF sensors and transmitters	Page 30
	Accessories	Page 31




# Save time



Save time



- ✓ Easy programming of flexible time programs
- ✓ Reliable products for long-lasting operation
- ✓ Broad portfolio for a wide range of applications
- ✓ Ideal for professional applications



Digital time switches

Masterclocks

Analogue time switches

Shutter controls

Elapsed time counters

Count down timers / Relays



# Digital time switches week

	<p>■ <b>müller</b> SC 08.11 pro</p> <p>■ <b>paladin</b> 172 110 pro</p> <p>1 channel version</p>	<ul style="list-style-type: none"> <li>■ Daily and weekly program</li> <li>■ DIN-rail mounting 17,5 mm</li> <li>■ 46 memory locations / PC-programmable</li> <li>■ Removable programming module</li> </ul>
	<p>■ <b>müller</b> SC 18.10 easy SC 18.20 easy</p> <p>■ <b>paladin</b> 170 410 easy 170 420 easy</p> <p>1 channel version 2 channel version</p>	<ul style="list-style-type: none"> <li>■ Daily and weekly program / Program by date</li> <li>■ DIN-rail mounting 35 mm</li> <li>■ 56 memory locations / Programmable via app</li> <li>■ Ideal for modern lamps (LED)</li> <li>■ Exchangeable battery</li> </ul>
	<p>■ <b>müller</b> SC 28.11 pro4 SC 28.21 pro4</p> <p>■ <b>paladin</b> 172 411 pro4 172 421 pro4</p> <p>1 channel version 2 channel version</p>	<ul style="list-style-type: none"> <li>■ Daily and weekly program / Program by date</li> <li>■ DIN-rail mounting 35 mm</li> <li>■ 100 memory locations / Programmable via app</li> <li>■ Zero-crossing, LED up to 600 W</li> <li>■ Exchangeable battery</li> </ul>
	<p>■ <b>müller</b> SC 88.10 pro4 SC 88.20 pro4 SC 88.30 pro4 SC 88.40 pro4</p> <p>1 channel version 2 channel version 3 channel version 4 channel version</p>	<ul style="list-style-type: none"> <li>■ Daily, weekly or astro program / Program by date</li> <li>■ DIN-rail mounting 70 mm</li> <li>■ 300 memory locations / Programmable via app</li> <li>■ DCF / GPS function</li> <li>■ Exchangeable battery</li> </ul>
	<p>■ <b>müller</b> SC 24.10 pro</p> <p>1 channel version</p>	<ul style="list-style-type: none"> <li>■ Daily and weekly program</li> <li>■ Switchboard panel</li> <li>■ Front 48 x 48 mm</li> <li>■ 46 memory locations</li> <li>■ External input</li> </ul>
	<p>■ <b>müller</b> SC 44.11 pro4 SC 44.21 pro4</p> <p>1 channel version 2 channel version</p>	<ul style="list-style-type: none"> <li>■ Daily, weekly or astro program / Program by date</li> <li>■ Switchboard panel and wall mounting</li> <li>■ 300 memory locations / Programmable via app</li> </ul>
	<p>■ <b>paladin</b> 173 110 easy</p> <p>1 channel version</p>	<ul style="list-style-type: none"> <li>■ Daily and weekly program</li> <li>■ Flush-mounted fitting</li> <li>■ 56 memory locations / Programmable via app</li> <li>■ Ideal for modern lamps (LED)</li> </ul>
	<p>■ <b>müller</b> EA 36.22 pro4</p> <p>Universal controller 2 channels 2 inputs Remote-controllable</p>	<ul style="list-style-type: none"> <li>■ Time switch week / astro</li> <li>■ Blind controller</li> <li>■ Flush-mounted fitting</li> <li>■ 100 memory locations</li> <li>■ Programmable and controllable via app</li> <li>■ Timer function with advance warning</li> </ul>

## Digital time switches astro



Save time

	<p>■ <b>müller</b> SC 08.13 pro</p> <p>■ <b>paladin</b> 172 113 pro</p> <p>1 channel version</p>	<ul style="list-style-type: none"> <li>■ Astro program</li> <li>■ Daily and weekly program</li> <li>■ DIN-rail mounting 17,5 mm</li> <li>■ 60 memory locations / PC-programmable</li> <li>■ Removable programming module</li> </ul>
	<p>■ <b>müller</b> SC 18.13 easy</p> <p>■ <b>paladin</b> 170 413 easy</p> <p>1 channel version</p>	<ul style="list-style-type: none"> <li>■ Astro-daily-program</li> <li>■ DIN-rail mounting 35 mm</li> <li>■ 4 memory locations / Programmable via app</li> <li>■ Ideal for modern lamps (LED)</li> <li>■ Exchangeable battery</li> </ul>
	<p>■ <b>müller</b> SC 18.14 easy SC 18.24 easy</p> <p>■ <b>paladin</b> 170 414 easy 170 424 easy</p> <p>1 channel version 2 channel version</p>	<ul style="list-style-type: none"> <li>■ Astro program</li> <li>■ Daily and weekly program</li> <li>■ DIN-rail mounting 35 mm</li> <li>■ 56 memory locations / Programmable via app</li> <li>■ Ideal for modern lamps (LED)</li> <li>■ Exchangeable battery</li> </ul>
	<p>■ <b>müller</b> SC 28.13 pro4 SC 28.23 pro4</p> <p>■ <b>paladin</b> 172 413 pro4 172 423 pro4</p> <p>1 channel version 2 channel version</p>	<ul style="list-style-type: none"> <li>■ Astro program</li> <li>■ Daily and weekly program</li> <li>■ DIN-rail mounting 35 mm</li> <li>■ 100 memory locations / Programmable via app</li> <li>■ Ideal for modern lamps (LED)</li> <li>■ Exchangeable battery</li> </ul>
	<p>■ <b>paladin</b> 173 113 easy</p> <p>1 channel version</p>	<ul style="list-style-type: none"> <li>■ Astro program</li> <li>■ Daily and weekly program</li> <li>■ Flush-mounted fitting</li> <li>■ 56 memory locations / Programmable via app</li> <li>■ Ideal for modern lamps (LED)</li> </ul>
	<p>■ <b>müller</b> EA 36.22 pro4</p> <p>Universal controller 2 channels 2 inputs Remote-controllable</p>	<ul style="list-style-type: none"> <li>■ Time switch week / astro</li> <li>■ Blind controller</li> <li>■ Flush-mounted fitting</li> <li>■ 100 memory locations</li> <li>■ Programmable and controllable via app</li> <li>■ Timer function with advance warning</li> </ul>

## Digital time switches year

	<p>■ <b>müller</b> SC 38.10 pro5 SC 38.20 pro5</p> <p>1 channel version 2 channel version</p>	<ul style="list-style-type: none"> <li>■ Daily, weekly, astro and annual programs</li> <li>■ DIN-rail mounting 35 mm</li> <li>■ 300 memory locations / Programmable and controllable via app</li> <li>■ Integrated WLAN and Bluetooth / remote access possible</li> <li>■ 1 external input</li> </ul>
	<p>■ <b>müller</b> SC 98.10 pro4 SC 98.20 pro4 SC 98.30 pro4 SC 98.40 pro4</p> <p>1 channel version 2 channel version 3 channel version 4 channel version</p>	<ul style="list-style-type: none"> <li>■ Daily, weekly and yearly program / Astro function</li> <li>■ DIN-rail mounting 70 mm</li> <li>■ 300 memory locations / Programmable via app</li> <li>■ DCF / GPS function</li> <li>■ Exchangeable battery</li> </ul>
	<p>■ <b>müller</b> SC 98.10 pro5 SC 98.20 pro5 SC 98.40 pro5</p> <p>1 channel version 2 channel version 4 channel version</p> <p>Available from Q3/2026</p>	<ul style="list-style-type: none"> <li>■ Daily, weekly, astro and annual programs</li> <li>■ DIN-rail mounting 70 mm</li> <li>■ 300 memory locations / Programmable via app</li> <li>■ DCF / GPS function</li> <li>■ Integrated WLAN and Bluetooth / remote access possible</li> <li>■ 1 external input</li> </ul>




# Masterclocks

	<p><b>■ müller</b> SC 58.07 pro</p> <p>1 slaveclock line</p>	<ul style="list-style-type: none"> <li>■ Master clock</li> <li>■ DCF / GPS function</li> <li>■ Approx. 5 slave clocks</li> <li>■ Security by PIN-code</li> </ul>
	<p><b>■ müller</b> SC 58.08 pro</p> <p>1 slaveclock line</p>	<ul style="list-style-type: none"> <li>■ Master clock</li> <li>■ Suitable for church clocks</li> <li>■ DCF / GPS function</li> <li>■ Security by PIN-code</li> </ul>
	<p><b>■ müller</b> SC 58.17 pro</p> <p>1 slaveclock line 1 channel</p>	<ul style="list-style-type: none"> <li>■ Master clock and digital time switch week</li> <li>■ 300 memory locations</li> <li>■ DCF / GPS function</li> <li>■ Approx. 20 slave clocks</li> <li>■ Security by PIN-code</li> </ul>
	<p><b>■ müller</b> SC 98.47 pro</p> <p>1 slaveclock line 4 channels</p>	<ul style="list-style-type: none"> <li>■ Master clock and digital time switch year</li> <li>■ 300 memory locations</li> <li>■ DCF / GPS function</li> <li>■ Approx. 40 slave clocks</li> <li>■ Security by PIN-code</li> </ul>
	<p><b>■ müller</b> SC 93.47 pro</p> <p>1 slaveclock line 4 channels</p>	<ul style="list-style-type: none"> <li>■ Master clock and digital time switch year</li> <li>■ 19"-housing</li> <li>■ 300 memory locations</li> <li>■ DCF / GPS function</li> <li>■ Approx. 200 slave clocks</li> <li>■ Security by PIN-code</li> </ul>
	<p><b>■ müller</b> SC 95.47 pro</p> <p>1 slaveclock line 4 channels</p>	<ul style="list-style-type: none"> <li>■ Master clock and digital time switch year</li> <li>■ 19"-housing</li> <li>■ 300 memory locations</li> <li>■ DCF / GPS function</li> <li>■ Approx. 200 slave clocks</li> <li>■ Security by PIN-code</li> </ul>

## Analogue time switches


	<p>■ <b>müller</b> VS 10.18 VS 14.18</p>	<p>■ <b>paladin</b> 111 120 114 120</p>	<p>Day without reserve Day with reserve</p>	<ul style="list-style-type: none"> <li>■ Daily program</li> <li>■ DIN-rail mounting 17,5 mm</li> <li>■ Captive setting keys</li> <li>■ Manual override switch</li> <li>Permanent ON / Permanent OFF / AUTO</li> </ul>
	<p>■ <b>müller</b> VS 20.18 VS 24.18</p>	<p>■ <b>paladin</b> 151 220 154 220</p>	<p>Day without reserve Day with reserve</p>	<ul style="list-style-type: none"> <li>■ Daily program</li> <li>■ DIN-rail mounting 35 mm</li> <li>■ Captive setting keys</li> <li>■ Manual override switch</li> <li>Permanent ON / Permanent OFF / AUTO</li> </ul>
	<p>■ <b>müller</b> VS 30.18 VS 34.18</p>	<p>■ <b>paladin</b> 131 120 134 120 131 420</p>	<p>Day without reserve Day with reserve Week without reserve</p>	<ul style="list-style-type: none"> <li>■ Daily program</li> <li>■ DIN-rail mounting 52,5 mm</li> <li>■ Wall mounting</li> <li>■ Captive setting keys</li> <li>■ Manual override switch</li> <li>Permanent ON / Permanent OFF / AUTO</li> </ul>
	<p>■ <b>müller</b> FS 60.18 FS 64.18 FS 60.38 FS 64.38</p>	<p>■ <b>paladin</b> 161 120 164 120 161 420 164 420</p>	<p>Day without reserve Day with reserve Week without reserve Week with reserve</p>	<ul style="list-style-type: none"> <li>■ Daily / Weekly program</li> <li>■ Wall mounting</li> <li>■ Switchboard panel</li> <li>■ Captive setting keys</li> <li>■ Manual override switch</li> <li>Permanent ON / Permanent OFF / AUTO</li> </ul>

## Blind controllers

	<p>■ <b>müller</b> EA 36.22 pro4</p>	<p>Universal controller 2 channels 2 inputs Remote-controllable</p>	<ul style="list-style-type: none"> <li>■ Time switch week / astro</li> <li>■ Blind controller</li> <li>■ Flush-mounted fitting</li> <li>■ 100 memory locations</li> <li>■ Programmable and controllable via app</li> <li>■ Timer function with advance warning</li> </ul>
---	--	---	---




# Elapsed time counters

	<p>■ müller</p> <p>BW 30.18</p>	AC / Front 53 x 28 mm	<ul style="list-style-type: none"> <li>Switchboard panel</li> <li>Integral locking spring</li> <li>With universal connections</li> <li>Mounting aperture: 50 x 25 mm</li> <li>With operation indicator</li> </ul>
	<p>■ müller</p> <p>BG 40.17 BW 40.18 BG 40.27 BW 40.28 BG 40.37 BW 40.38</p>	<p>DC / Front 48 x 48 mm AC / Front 48 x 48 mm DC / Front 55 x 55 mm AC / Front 55 x 55 mm DC / Front 72 x 72 mm AC / Front 72 x 72 mm</p>	<ul style="list-style-type: none"> <li>Switchboard panel</li> <li>With retaining clip</li> <li>With universal connections</li> <li>Mounting aperture square: 45x45mm / circle: 50,5mm</li> <li>With operation indicator</li> </ul>
	<p>■ müller     ■ paladin</p> <p>BG 70.18     312 170 BW 70.18     311 170</p>	<p>DC AC</p>	<ul style="list-style-type: none"> <li>DIN-rail mounting 17,5 mm</li> <li>No terminal cover</li> <li>Screw terminals (pull-up type)</li> <li>Touch proof connections</li> <li>With operation indicator</li> </ul>
	<p>■ müller     ■ paladin</p> <p>BG 70.29     312 270 BW 70.29     311 270 BG 70.89     312 280 BW 70.89     311 280</p>	<p>DC / without terminal cover AC / without terminal cover DC / with terminal cover AC / with terminal cover</p>	<ul style="list-style-type: none"> <li>DIN-rail mounting 35 mm</li> <li>With or without terminal cover</li> <li>Screw terminals (pull-up type)</li> <li>Touch proof connections</li> <li>With operation indicator</li> </ul>



# Count down timers / Relays

	<p>■ müller</p> <p>TC 14.21 TC 24.21</p>	<p>9:59:59 hh:mm:ss 99:59:59 hh:mm:ss</p>	<ul style="list-style-type: none"> <li>Timer</li> <li>Panel mounting</li> <li>Front 48 x 48 mm</li> <li>1 change-over relay</li> <li>Repeatability accuracy 100%</li> <li>Inputs for START / STOP</li> </ul>
	<p>■ müller</p> <p>MR 28.10 pro</p>	<p>999:59:59:59 hhh:mm:ss:1/10s</p>	<ul style="list-style-type: none"> <li>Digital multifunctional relay</li> <li>DIN-rail mounting 35 mm</li> <li>1 channel (CO)</li> <li>20 functions</li> <li>External input</li> </ul>
	<p>■ müller</p> <p>EA 36.22 pro4</p>	<p>Universal controller 2 channels 2 inputs Remote-controllable</p>	<ul style="list-style-type: none"> <li>Time switch week / astro</li> <li>Blind controller</li> <li>Flush-mounted fitting</li> <li>100 memory locations</li> <li>Programmable and controllable via app</li> <li>Timer function with advance warning</li> </ul>

# Accessories

	<p><b>■ müller</b> DK pro</p> <p>Data-key</p>	<ul style="list-style-type: none"> <li>■ Data-key for Programming Package PP 50.00 pro</li> <li>■ Accessory for pro-devices and SC 98.40 knx</li> <li>■ Convenient programming of switching times on the PC</li> </ul>
	<p><b>■ müller</b> PP 50.00 pro</p> <p>Programming Package USB</p>	<ul style="list-style-type: none"> <li>■ Programming Package Save 'n carry</li> <li>■ Accessory for pro-devices and SC 98.40 knx</li> <li>■ Convenient programming of switching times on the PC</li> <li>■ Data download from key to PC, modification of data and upload to key</li> <li>■ Switching programs can be archived on the PC</li> </ul>
	<p><b>■ müller</b> FU 20.00 pro</p> <p>DCF-time</p> <p>FU 30.00 pro</p> <p>GPS-time</p>	<ul style="list-style-type: none"> <li>■ Radio receiver</li> <li>■ FU 20.00 pro: 2-wire-connection</li> <li>■ FU 30.00 pro: 3-wire-connection</li> <li>■ Accessory for time switches and master clocks</li> <li>■ Time and date are automatically transferred to the time switch</li> </ul>

	<p>Trim 55x55 for Bx 40 / TC x4 / SC 24.10 pro</p> <p>Order number 190.003</p>		<p>Self-adhesive seal for Bx 40 / TC x4 / SC 24.10 pro</p> <p>Order number 101.001</p>
	<p>Mask 72x72 for Bx 40 / TC x4 / SC 24.10 pro</p> <p>Order number 190.004</p>		<p>IP54-seal for Bx 40 / TC x4 / SC 24.10 pro</p> <p>Order number 101.003</p>
	<p>Mask Ø 72 (installation Ø 60) for Bx 40 / TC x4 / SC 24.10 pro</p> <p>Order number 190.008</p>		<p>Retaining clip for Bx 40 / TC x4 / SC 24.10 pro</p> <p>Order number 715.003</p>

	<p>Terminal Cover for Bx 29</p> <p>Order number 003.008 (black) Order number 003.010 (white)</p>		<p>Retaining clip for Bx 30</p> <p>Order number 715.005</p>
---	--	---	---





- ✓ Automatic switching and dimming of lighting
- ✓ Energy savings through targeted operating times
- ✓ Flexible configuration options
- ✓ Ideal lighting for interiors, pathways, shop windows and more



Staircase lighting timers

Twilight switches


Digital astro timers

Dimmers


Smart Bluetooth Dimmers






## Staircase lighting timers

	<b>paladin</b> 284 210	Without advance warning	<ul style="list-style-type: none"> <li>Staircase lighting timer</li> <li>Electronic</li> <li>DIN-rail mounting 17,5 mm</li> <li>3- or 4-conductor rising mains</li> <li>Zero-cross switching</li> <li>Resettable</li> </ul>
	284 250	With advance warning	

## Twilight switches

	<b>paladin</b> 972 413 easy	1 channel version	<ul style="list-style-type: none"> <li>Digitale twilight switch</li> <li>With daily program</li> <li>DIN-rail mounting 35 mm</li> <li>Programmable via app</li> <li>Ideal for modern lamps (LED)</li> <li>Exchangeable battery</li> </ul>
	<b>paladin</b> 922 000	1 channel version	<ul style="list-style-type: none"> <li>Analogue twilight switch</li> <li>Wall mounting</li> <li>Ideal for modern lamps (LED)</li> </ul>
	<b>paladin</b> 923 500	1 channel version sensor for wall mounting	<ul style="list-style-type: none"> <li>Analogue twilight switch</li> <li>DIN-rail mounting 17,5 mm</li> <li>Zero-cross switching</li> <li>Ideal for modern lamps (LED)</li> </ul>

## Dimmers



	<b>paladin</b> 873 030 led	for LED loads	<ul style="list-style-type: none"> <li>LED dimmer</li> <li>Flush-mounted fitting</li> <li>Dimensions: 46 x 42 x 13 mm</li> <li>Load 4 - 100 W / 350 W</li> <li>Memory function</li> <li>With litz wires</li> </ul>
	<b>paladin</b> 873 031 led	for LED loads without neutral wire	<ul style="list-style-type: none"> <li>LED dimmer without N-wire</li> <li>Flush-mounted fitting</li> <li>Dimensions: 46 x 42 x 13 mm</li> <li>Load 4 - 80 W / 200 W</li> <li>Memory function</li> <li>With litz wires</li> </ul>
	<b>paladin</b> 873 040 led	for LED-strips	<ul style="list-style-type: none"> <li>LED-strips dimmer</li> <li>Flush-mounted fitting</li> <li>Dimensions: 46 x 42 x 13 mm</li> <li>LED-strips 8 A</li> <li>Memory function</li> <li>With litz wires</li> </ul>

## Dimmers



	<p>■ <b>paladin</b> 872 110 led for LED loads</p>	<ul style="list-style-type: none"> <li>■ LED dimmer / Universal dimmer</li> <li>■ DIN-rail mounting 17,5 mm</li> <li>■ LED Load 4 - 80 VA</li> <li>■ Memory function</li> <li>■ Master-slave-function</li> </ul>
	<p>■ <b>paladin</b> 879 410 led for dimmable LEDs</p>	<ul style="list-style-type: none"> <li>■ TRIAC dimmer for LED lamps</li> <li>■ DIN-rail mounting 87,5 mm</li> <li>■ Dimmable LEDs 4 - 1.200 W</li> <li>■ Memory function</li> <li>■ Master-slave-function</li> </ul>

## Astro dimmers

 	<p>■ <b>paladin</b> 872 413 pro4 LED dimmer</p>	<ul style="list-style-type: none"> <li>■ LED dimmer</li> <li>■ Astro function</li> <li>■ DIN-rail mounting 35 mm</li> <li>■ LED loads 4 - 150 W / trailing edge dimming</li> <li>■ 100 memory locations / Programmable via app</li> </ul>
--	---	---


## Smart bluetooth dimmers

 	<p>■ <b>müller</b> EA 26.11 pro4 LED dimmer mini</p>	<ul style="list-style-type: none"> <li>■ LED-dimmer with astro function</li> <li>■ Flush-mounted fitting</li> <li>■ LED-loads 4 - 150 W / trailing edge dimming</li> <li>■ Remote control via Bluetooth mesh / gateway</li> <li>■ Programmable and controllable via App</li> </ul>
 	<p>■ <b>müller</b> EA 27.11 pro4 LED-strip dimmer mini</p>	<ul style="list-style-type: none"> <li>■ LED-dimmer with astro function</li> <li>■ Flush-mounted fitting</li> <li>■ LED strips (12-24 V DC) 4 A / pulse width modulation</li> <li>■ Remote control via Bluetooth mesh / gateway</li> <li>■ Programmable and controllable via App</li> </ul>
 	<p>■ <b>müller</b> EA 66.11 pro4 LED dimmer</p>	<ul style="list-style-type: none"> <li>■ LED-dimmer with astro function</li> <li>■ Flush-mounted fitting</li> <li>■ LED-Last 4 - 150 W / trailing edge dimming</li> <li>■ Remote control via Bluetooth mesh / gateway</li> <li>■ Programmable and controllable via App</li> </ul>
 	<p>■ <b>müller</b> EA 76.10 pro4 Touch LED dimmer</p>	<ul style="list-style-type: none"> <li>■ LED-dimmer with astro function</li> <li>■ Flush-mounted fitting</li> <li>■ LED-Last 4 - 150 W / trailing edge dimming</li> <li>■ Remote control via Bluetooth mesh / gateway</li> <li>■ Programmable and controllable via App</li> </ul>

# Feel well



- ✓ Precise measurement of relevant indoor climate parameters
- ✓ For modern HVAC installations
- ✓ For a healthy and comfortable indoor climate
- ✓ Modern and timeless design






Modbus sensors




0-10 V Sensors

Air quality sensors / CO<sub>2</sub>-monitor


## Modbus sensors

	<p>■ <b>müller</b> TS 30.40 mod Room temperature sensor</p> <p>TS 31.40 mod Room temperature sensor with manual set-point temperature adjustment</p>	<p>Room temperature sensor</p> <p>Room temperature sensor with manual set-point temperature adjustment</p>	<ul style="list-style-type: none"> <li>■ Temperature sensor</li> <li>■ Wall mounting / modern and planar design [80 mm]</li> <li>■ Modbus ASCII and RTU</li> <li>■ 2 Control outputs (0-10 V)</li> <li>■ 2 Control outputs (FET)</li> </ul>
	<p>■ <b>müller</b> GS 30.40 mod Room temperature sensor with hygrostat</p> <p>GS 31.40 mod Room temperature sensor with hygrostat with manual set-point temperature adjustment</p>	<p>Room temperature sensor with hygrostat</p> <p>Room temperature sensor with hygrostat with manual set-point temperature adjustment</p>	<ul style="list-style-type: none"> <li>■ Temperature, humidity and atmospheric pressure sensor</li> <li>■ Wall mounting / modern and planar design [80 mm]</li> <li>■ Modbus ASCII and RTU</li> <li>■ 2 Control outputs (0-10 V)</li> <li>■ 2 Control outputs (FET)</li> </ul>
	<p>■ <b>müller</b> GS 40.40 mod CO<sub>2</sub>-air quality sensor</p> <p>GS 41.40 mod CO<sub>2</sub>-air quality sensor with manual set-point temperature adjustment</p>	<p>CO<sub>2</sub>-air quality sensor</p> <p>CO<sub>2</sub>-air quality sensor with manual set-point temperature adjustment</p>	<ul style="list-style-type: none"> <li>■ CO<sub>2</sub>, temperature, humidity and atmospheric pressure sensor</li> <li>■ Wall mounting / modern and planar design [80 mm]</li> <li>■ Modbus ASCII und RTU</li> <li>■ 2 Control outputs (0-10 V)</li> <li>■ 2 Control outputs (FET)</li> </ul>

## 0-10V sensors

	<p>■ <b>müller</b> TS 30.00 pro Room temperature sensor</p>	<p>Room temperature sensor</p>	<ul style="list-style-type: none"> <li>■ Temperature sensor</li> <li>■ Wall mounting / modern and planar design [80 mm]</li> <li>■ Control output (0 - 10 V)</li> </ul>
	<p>■ <b>müller</b> GS 30.00 pro Room temperature sensor &amp; rel. humidity sensor</p>	<p>Room temperature sensor &amp; rel. humidity sensor</p>	<ul style="list-style-type: none"> <li>■ Temperature, humidity and atmospheric pressure sensor</li> <li>■ Wall mounting / modern and planar design [80 mm]</li> <li>■ 2 control outputs (0 - 10 V)</li> </ul>
	<p>■ <b>müller</b> GS 40.00 pro CO<sub>2</sub>-air quality sensor &amp; room climate sensor</p>	<p>CO<sub>2</sub>-air quality sensor &amp; room climate sensor</p>	<ul style="list-style-type: none"> <li>■ CO<sub>2</sub>, temperature, humidity and atmospheric pressure sensor</li> <li>■ Wall mounting / modern and planar design [80 mm]</li> <li>■ 3 control outputs (0 - 10 V)</li> </ul>

## Air quality sensors / CO<sub>2</sub>-monitor


	<p>■ <b>müller</b> GS 42.00 pro CO<sub>2</sub>-monitor with power supply for flush-mounting</p>	<p>CO<sub>2</sub>-monitor with power supply for flush-mounting</p>	<ul style="list-style-type: none"> <li>■ Air quality sensor / CO<sub>2</sub>-monitor</li> <li>■ Wall mounting / modern and planar design [80 mm]</li> <li>■ CO<sub>2</sub> sensor</li> <li>■ Maintenance-free through self-calibration</li> <li>■ Mute function</li> <li>■ 3 open collector outputs</li> </ul>
---	---	--	--



# smart home



- ✓ Dimming and switching lights
- ✓ Control of shutters and blinds, time- and light-dependent
- ✓ Control the room temperature
- ✓ Switching electrical loads on and off



### Set times

With the integrated astro and weekly timer, flexible programs can be created for each mi.puck.



### BT-Mesh network

The devices form a Bluetooth mesh, ensuring connectivity that is reliable even without cabling.

### Flexible access

You can control the system via a switch, push-button or the app and access it from anywhere using the gateway.



## mi.puck switches

	<p><b>müller</b> EA 16.11 pro4</p> <p>Multifunctional device 1 channel 1 input mini</p>	<ul style="list-style-type: none"> <li>Time switch week / astro</li> <li>Clock thermostat (with LS 20.00 pro4)</li> <li>Flush-mounted fitting</li> <li>Remote control via Bluetooth mesh / gateway</li> </ul>
	<p><b>müller</b> EA 46.22 pro4</p> <p>Multifunctional device 2 channels 2 inputs</p>	<ul style="list-style-type: none"> <li>Time switch week / astro</li> <li>Blind controller</li> <li>Clock thermostat (with LS 20.00 pro4)</li> <li>Flush-mounted fitting</li> <li>Remote control via Bluetooth mesh / gateway</li> </ul>

## mi.puck dimmers

	<p><b>müller</b> EA 26.11 pro4</p> <p>LED-dimmer mini</p>	<ul style="list-style-type: none"> <li>LED-dimmer with astro function</li> <li>Flush-mounted fitting</li> <li>LED loads 4 - 150 W / trailing edge dimming</li> <li>Remote control via Bluetooth mesh / gateway</li> </ul>
	<p><b>müller</b> EA 27.11 pro4</p> <p>LED-strip dimmer mini</p>	<ul style="list-style-type: none"> <li>LED-dimmer with astro function</li> <li>Flush-mounted fitting</li> <li>LED strips (12 - 24 V DC ) 4 A / pulse width modulation</li> <li>Remote control via Bluetooth mesh / gateway</li> </ul>
	<p><b>müller</b> EA 66.11 pro4</p> <p>LED-dimmer</p>	<ul style="list-style-type: none"> <li>LED-dimmer with astro function</li> <li>Flush-mounted fitting</li> <li>LED loads 4 - 150 W / trailing edge dimming</li> <li>Remote control via Bluetooth mesh / gateway</li> </ul>
	<p><b>müller</b> EA 76.10 pro4</p> <p>Touch LED-dimmer</p>	<ul style="list-style-type: none"> <li>Touch LED-dimmer with astro function</li> <li>Flush-mounted fitting / fits into 55 x 55 mm switch design</li> <li>LED loads 4 - 150 W / trailing edge dimming</li> <li>Remote control via Bluetooth mesh / gateway</li> </ul>

## mi.puck accessories

	<p><b>müller</b> LS 20.00 pro4</p> <p>Multisensor</p>	<ul style="list-style-type: none"> <li>Licht- / Helligkeits-, Temperatur- und rel. Feuchtesensor</li> <li>Passend zu: EA 16.11 pro4 und EA 46.22 pro4</li> <li>Wandmontage / Einbau im Schalterprogramm [55 mm mini] / Außenmontage</li> <li>Kompakte Bauform</li> </ul>
	<p><b>müller</b> mi.puck App</p> <p>kostenloser Download</p>	<ul style="list-style-type: none"> <li>App zur Programmierung und Bedienung der mi.puck Geräte</li> <li>Erstellen eines Netzwerkes mit Bluetooth-Mesh</li> <li>Integrierte Gateway-Funktion</li> </ul>





- ✓ KNX Secure
- ✓ Precise indoor climate sensors and controllers
- ✓ Audio interfaces
- ✓ Pure, timeless designs for modern buildings



Room climate controllers

Push-button sensors

Multi sensors




Outdoor sensors

Audio interfaces




Further TP products

KNX-RF S-mode products

# KNX room temperature controllers

	<p>■ <b>müller</b> TS 10.00 knx</p> <p>Room temperature controller</p>	<ul style="list-style-type: none"> <li>■ Temperature sensor</li> <li>■ Wall mounting / fits in common switch range [55 mm] / outdoor installation</li> <li>■ Compact housing</li> </ul>
	<p>■ <b>müller</b> TS 30.11 knx</p> <p>Room temperature controller</p> <p>TS 31.11 knx</p> <p>Room temperature controller with manual set-point temperature adjustment</p>	<ul style="list-style-type: none"> <li>■ Temperature sensor</li> <li>■ Wall mounting / modern and planar design [80 mm]</li> <li>■ 5 binary and analogue inputs</li> </ul>
	<p>■ <b>müller</b> TS 30.12 knx</p> <p>Room temperature controller</p> <p>TS 31.12 knx</p> <p>Room temperature controller with manual set-point temperature adjustment</p> <p><b>Available from Q2/2026</b></p>	<ul style="list-style-type: none"> <li>■ Temperature sensor</li> <li>■ Wall mounting / modern and planar design [80 mm]</li> <li>■ 3 analogue outputs (0-10 V), 4 binary inputs</li> <li>■ 1 input for an external temperature sensor</li> <li>■ KNX Secure</li> </ul>
	<p>■ <b>müller</b> TS 37.11 knx</p> <p>Room temperature controller</p> <p>TS 38.11 knx</p> <p>Room temperature controller with manual set-point temperature adjustment</p>	<ul style="list-style-type: none"> <li>■ Temperature sensor</li> <li>■ Flush-mounted fitting / fits in common switch range [55 mm]</li> <li>■ 5 binary and analogue inputs</li> </ul>
	<p>■ <b>müller</b> TS 57.00 knx0</p> <p>Room temperature controller</p> <p>TS 58.00 knx2</p> <p>Room temperature controller with manual set-point temperature adjustment</p>	<ul style="list-style-type: none"> <li>■ Temperature sensor</li> <li>■ Flush-mounted fitting / fits in common switch range [55 mm]</li> <li>■ 3 analogue outputs (0-10 V), 3 binary inputs</li> <li>■ 1 input for an external temperature sensor</li> <li>■ KNX Secure</li> </ul>



# KNX humidity controllers

	<p>■ <b>müller</b> GS 10.00 knx</p> <p>Room temperature controller &amp; hygrostat</p>	<ul style="list-style-type: none"> <li>■ Temperature, humidity and atmospheric pressure sensor</li> <li>■ Wall mounting / fits in common switch range [55 mm] / outdoor installation</li> <li>■ Compact housing</li> </ul>
	<p>■ <b>müller</b> GS 30.11 knx</p> <p>Room temperature controller &amp; hygrostat</p> <p>GS 31.11 knx</p> <p>Room temp. controller &amp; hygrostat with manual set-point temperature adjustment</p>	<ul style="list-style-type: none"> <li>■ Temperature, humidity and atmospheric pressure sensor</li> <li>■ Wall mounting / modern and planar design [80 mm]</li> <li>■ 5 binary and analogue inputs</li> </ul>
	<p>■ <b>müller</b> GS 30.12 knx</p> <p>Room temperature controller &amp; hygrostat</p> <p>GS 31.12 knx</p> <p>Room temp. controller &amp; hygrostat with manual set-point temperature adjustment</p> <p><b>Available from Q2/2026</b></p>	<ul style="list-style-type: none"> <li>■ Temperature, humidity and atmospheric pressure sensor</li> <li>■ Wall mounting / modern and planar design [80 mm]</li> <li>■ 3 analogue outputs (0-10 V), 4 binary inputs</li> <li>■ 1 input for an external temperature sensor</li> <li>■ KNX Secure</li> </ul>



# KNX air quality controllers

 <p>VOC</p>	<p>■ <b>müller</b> GS 20.00 knx VOC-air quality sensor &amp; controller</p>	<ul style="list-style-type: none"> <li>■ Air quality sensor and controller</li> <li>■ Wall mounting / fits in common switch range [55 mm] / outdoor installation</li> <li>■ VOC, temperature, humidity and atmospheric pressure sensor</li> </ul>
 <p>CO<sub>2</sub></p>	<p>■ <b>müller</b> GS 40.01 knx CO<sub>2</sub>-air quality sensor &amp; controller</p> <p>GS 41.01 knx CO<sub>2</sub>-air quality sensor &amp; controller with manual set-point temperature adjustment</p>	<ul style="list-style-type: none"> <li>■ Air quality sensor and controller</li> <li>■ Wall mounting / modern and planar design [80 mm]</li> <li>■ CO<sub>2</sub>, temperature, humidity and atmospheric pressure sensor</li> </ul>
 <p>CO<sub>2</sub></p>	<p>■ <b>müller</b> GS 40.11 knx CO<sub>2</sub>-air quality sensor &amp; controller</p> <p>GS 41.11 knx CO<sub>2</sub>-air quality sensor &amp; controller with manual set-point temperature adjustment</p>	<ul style="list-style-type: none"> <li>■ Air quality sensor and controller</li> <li>■ Wall mounting / modern and planar design [80 mm]</li> <li>■ CO<sub>2</sub>, temperature, humidity and atmospheric pressure sensor</li> <li>■ 5 binary and analogue inputs</li> </ul>
 <p>CO<sub>2</sub></p>	<p>■ <b>müller</b> GS 40.12 knx CO<sub>2</sub>-air quality sensor &amp; controller</p> <p>GS 41.12 knx CO<sub>2</sub>-air quality sensor &amp; controller with manual set-point temperature adjustment</p> <p><b>Available from Q2/2026</b></p>	<ul style="list-style-type: none"> <li>■ Air quality sensor and controller</li> <li>■ Wall mounting / modern and planar design [80 mm]</li> <li>■ CO<sub>2</sub>, temperature, humidity and atmospheric pressure sensor</li> <li>■ 3 analogue outputs (0-10 V), 4 binary inputs</li> <li>■ 1 input for an external temperature sensor</li> <li>■ KNX Secure</li> </ul>
 <p>CO<sub>2</sub></p>	<p>■ <b>müller</b> GS 47.11 knx CO<sub>2</sub>-air quality sensor &amp; controller &amp; CO<sub>2</sub>/rH-monitor</p> <p>GS 48.11 knx CO<sub>2</sub>-air quality sensor &amp; controller with manual set-point temperature adjustment &amp; CO<sub>2</sub>/rH-monitor</p>	<ul style="list-style-type: none"> <li>■ Air quality sensor and controller</li> <li>■ Flush-mounted fitting / fits in common switch range [55 mm]</li> <li>■ CO<sub>2</sub>, temperature, humidity and atmospheric pressure sensor</li> <li>■ 5 binary and analogue inputs</li> </ul>
 <p>CO<sub>2</sub></p>	<p>■ <b>müller</b> GS 67.00 knx0 CO<sub>2</sub>-air quality sensor &amp; controller</p> <p>GS 68.00 knx2 CO<sub>2</sub>-air quality sensor &amp; controller with manual set-point temperature adjustment</p>	<ul style="list-style-type: none"> <li>■ Air quality sensor and controller</li> <li>■ Flush-mounted fitting / fits in common switch range [55 mm]</li> <li>■ 3 analogue outputs (0-10 V), 3 binary inputs</li> <li>■ 1 input for an external temperature sensor</li> <li>■ KNX Secure</li> </ul>
 <p>PM<sub>2.5</sub></p>	<p>■ <b>müller</b> GS 70.00 knx Particulate matter sensor &amp; air quality controller</p>	<ul style="list-style-type: none"> <li>■ Particulate matter sensor and air quality controller</li> <li>■ VOC sensor</li> <li>■ Temperature, humidity and atmospheric pressure sensor</li> <li>■ Wall mounting / modern and planar design [80 mm]</li> </ul>

## KNX push-button sensors 2-fold

	<p>■ <b>müller</b></p> <p>TS 57.00 knx2      2 neutral buttons</p>	<ul style="list-style-type: none"> <li>■ Temperature sensor / room temperature controller</li> <li>■ Flush mounting / Fits in common switch range [55 mm]</li> <li>■ 3 analog outputs (0-10 V), 3 binary inputs</li> <li>■ 1 input for ext. temperature sensor</li> <li>■ KNX Secure</li> </ul>
	<p>TS 58.00 knx2      temperature display 2 buttons temperature</p>	
	<p>■ <b>müller</b></p> <p>GS 67.00 knx2      2 neutral buttons</p>	<ul style="list-style-type: none"> <li>■ CO<sub>2</sub>, temperature, humidity and air pressure sensor / air quality controller</li> <li>■ Flush mounting / Fits in common switch range [55 mm]</li> <li>■ 3 analog outputs (0-10 V), 3 binary inputs</li> <li>■ 1 input for ext. temperature sensor</li> <li>■ KNX Secure</li> </ul>
	<p>GS 68.00 knx2      temperature display 2 buttons temperature</p>	

## KNX push-button sensors 4-fold

	<p>■ <b>müller</b></p> <p>TS 57.00 knx4      4 neutral buttons</p>	<ul style="list-style-type: none"> <li>■ Temperature sensor / room temperature controller</li> <li>■ Flush mounting / Fits in common switch range [55 mm]</li> <li>■ 3 analog outputs (0-10 V), 3 binary inputs</li> <li>■ 1 input for ext. temperature sensor</li> <li>■ KNX Secure</li> </ul>
	<p>TS 58.00 knx4      temperature display 2 buttons temperature 2 neutral buttons</p>	
	<p>■ <b>müller</b></p> <p>GS 67.00 knx4      4 neutral buttons</p>	<ul style="list-style-type: none"> <li>■ CO<sub>2</sub>, temperature, humidity and air pressure sensor / air quality controller</li> <li>■ Flush mounting / Fits in common switch range [55 mm]</li> <li>■ 3 analog outputs (0-10 V), 3 binary inputs</li> <li>■ 1 input for ext. temperature sensor</li> <li>■ KNX Secure</li> </ul>
	<p>GS 68.00 knx4      temperature display 2 buttons temperature 2 neutral buttons</p>	

## KNX push-button sensors 4-fold with icons

	<p>■ <b>müller</b></p> <p>TS 57.11 knx4      2 buttons light 2 buttons shutter</p>	<ul style="list-style-type: none"> <li>■ Temperature sensor / room temperature controller</li> <li>■ Flush mounting / Fits in common switch range [55 mm]</li> <li>■ 3 analog outputs (0-10 V), 3 binary inputs</li> <li>■ 1 input for ext. temperature sensor</li> <li>■ KNX Secure</li> </ul>
	<p>■ <b>müller</b></p> <p>TS 58.10 knx4      temperature display 2 buttons temperature 2 buttons light</p>	<ul style="list-style-type: none"> <li>■ Temperature sensor / room temperature controller</li> <li>■ Flush mounting / Fits in common switch range [55 mm]</li> <li>■ 3 analog outputs (0-10 V), 3 binary inputs</li> <li>■ 1 input for ext. temperature sensor</li> <li>■ KNX Secure</li> </ul>
	<p>■ <b>müller</b></p> <p>GS 67.11 knx4      2 buttons light 2 buttons shutter</p>	<ul style="list-style-type: none"> <li>■ CO<sub>2</sub>, temperature, humidity and air pressure sensor / air quality controller</li> <li>■ Flush mounting / Fits in common switch range [55 mm]</li> <li>■ 3 analog outputs (0-10 V), 3 binary inputs</li> <li>■ 1 input for ext. temperature sensor</li> <li>■ KNX Secure</li> </ul>
	<p>■ <b>müller</b></p> <p>GS 68.10 knx4      temperature display 2 buttons temperature 2 buttons light</p>	<ul style="list-style-type: none"> <li>■ CO<sub>2</sub>, temperature, humidity and air pressure sensor / air quality controller</li> <li>■ Flush mounting / Fits in common switch range [55 mm]</li> <li>■ 3 analog outputs (0-10 V), 3 binary inputs</li> <li>■ 1 input for ext. temperature sensor</li> <li>■ KNX Secure</li> </ul>



# KNX push-button sensors 6-fold

	<p>■ <b>müller</b> TS 57.00 knx6      6 neutral buttons</p> <p>TS 58.00 knx6      temperature display 2 buttons temperature 4 neutral buttons</p>	<ul style="list-style-type: none"> <li>■ Temperature sensor / room temperature controller</li> <li>■ Flush mounting / Fits in common switch range [55 mm]</li> <li>■ 3 analog outputs (0-10 V), 3 binary inputs</li> <li>■ 1 input for ext. temperature sensor</li> <li>■ KNX Secure</li> </ul>
	<p>■ <b>müller</b> GS 67.00 knx6      6 neutral buttons</p> <p>GS 68.00 knx6      temperature display 2 buttons temperature 4 neutral buttons</p>	<ul style="list-style-type: none"> <li>■ CO<sub>2</sub>, temperature, humidity and air pressure sensor / air quality controller</li> <li>■ Flush mounting / Fits in common switch range [55 mm]</li> <li>■ 3 analog outputs (0-10 V), 3 binary inputs</li> <li>■ 1 input for ext. temperature sensor</li> <li>■ KNX Secure</li> </ul>

# KNX push-button sensors 6-fold with icons

	<p>■ <b>müller</b> TS 57.21 knx6      4 buttons light 2 buttons shutter</p>	<ul style="list-style-type: none"> <li>■ Temperature sensor / room temperature controller</li> <li>■ Flush mounting / Fits in common switch range [55 mm]</li> <li>■ 3 analog outputs (0-10 V), 3 binary inputs</li> <li>■ 1 input for ext. temperature sensor</li> <li>■ KNX Secure</li> </ul>
	<p>■ <b>müller</b> TS 58.11 knx6      temperature display 2 buttons temperature 2 buttons light 2 buttons shutter</p>	<ul style="list-style-type: none"> <li>■ Temperature sensor / room temperature controller</li> <li>■ Flush mounting / Fits in common switch range [55 mm]</li> <li>■ 3 analog outputs (0-10 V), 3 binary inputs</li> <li>■ 1 input for ext. temperature sensor</li> <li>■ KNX Secure</li> </ul>
	<p>■ <b>müller</b> TS 58.20 knx6      temperature display 2 buttons temperature 2 buttons light</p>	<ul style="list-style-type: none"> <li>■ Temperature sensor / room temperature controller</li> <li>■ Flush mounting / Fits in common switch range [55 mm]</li> <li>■ 3 analog outputs (0-10 V), 3 binary inputs</li> <li>■ 1 input for ext. temperature sensor</li> <li>■ KNX Secure</li> </ul>
	<p>■ <b>müller</b> GS 67.21 knx6      4 buttons light 2 buttons shutter</p>	<ul style="list-style-type: none"> <li>■ CO<sub>2</sub>, temperature, humidity and air pressure sensor / air quality controller</li> <li>■ Flush mounting / Fits in common switch range [55 mm]</li> <li>■ 3 analog outputs (0-10 V), 3 binary inputs</li> <li>■ 1 input for ext. temperature sensor</li> <li>■ KNX Secure</li> </ul>
	<p>■ <b>müller</b> GS 68.11 knx6      temperature display 2 buttons temperature 2 buttons light 2 buttons shutter</p>	<ul style="list-style-type: none"> <li>■ CO<sub>2</sub>, temperature, humidity and air pressure sensor / air quality controller</li> <li>■ Flush mounting / Fits in common switch range [55 mm]</li> <li>■ 3 analog outputs (0-10 V), 3 binary inputs</li> <li>■ 1 input for ext. temperature sensor</li> <li>■ KNX Secure</li> </ul>
	<p>■ <b>müller</b> GS 68.20 knx6      temperature display 2 buttons temperature 2 buttons light</p>	<ul style="list-style-type: none"> <li>■ CO<sub>2</sub>, temperature, humidity and air pressure sensor / air quality controller</li> <li>■ Flush mounting / Fits in common switch range [55 mm]</li> <li>■ 3 analog outputs (0-10 V), 3 binary inputs</li> <li>■ 1 input for ext. temperature sensor</li> <li>■ KNX Secure</li> </ul>


## KNX multi sensors wall & corridor

 <p>TS 77.10 knx TS 78.10 knx</p> <p>CO<sub>2</sub></p>	<p>■ <b>müller</b></p> <p>Linear detection range (wall or corridor mounting)</p> <p>Linear detection range (wall mounting) with manual set-point temperature adjustment</p> <p><b>Available from Q3/2026</b></p>	<ul style="list-style-type: none"> <li>■ Motion detector with PIR technology</li> <li>■ Light and temperature sensor / light and room temperature controller</li> <li>■ 3 analog outputs (0-10V) / 4 binary and analog outputs</li> <li>■ 1 input for an external temperature sensor</li> <li>■ KNX Secure</li> </ul>
 <p>GS 87.10 knx GS 88.10 knx</p> <p>CO<sub>2</sub></p>	<p>■ <b>müller</b></p> <p>Linear detection range (wall or corridor mounting)</p> <p>Linear detection range (wall mounting) with manual set-point temperature adjustment</p> <p><b>Available from Q3/2026</b></p>	<ul style="list-style-type: none"> <li>■ Motion detector with PIR technology</li> <li>■ CO<sub>2</sub>-, VOC, light, temperature and humidity sensor / light and air quality controller</li> <li>■ 3 analog outputs (0-10V) / 4 binary and analog outputs</li> <li>■ 1 input for an external temperature sensor</li> <li>■ KNX Secure</li> </ul>




## KNX multi sensors ceiling

 <p>TS 77.11 knx</p> <p>CO<sub>2</sub></p>	<p>■ <b>müller</b></p> <p>360° detection range (ceiling mounting)</p> <p><b>Available from Q3/2026</b></p>	<ul style="list-style-type: none"> <li>■ Motion detector with PIR technology</li> <li>■ Light and temperature sensor / light and room temperature controller</li> <li>■ 3 analog outputs (0-10V) / 4 binary and analog outputs</li> <li>■ 1 input for an external temperature sensor</li> <li>■ KNX Secure</li> </ul>
 <p>GS 87.11 knx</p> <p>CO<sub>2</sub></p>	<p>■ <b>müller</b></p> <p>360° detection range (ceiling mounting)</p> <p><b>Available from Q3/2026</b></p>	<ul style="list-style-type: none"> <li>■ Motion detector with PIR technology</li> <li>■ CO<sub>2</sub>-, VOC, light, temperature and humidity sensor / light and air quality controller</li> <li>■ 3 analog outputs (0-10V) / 4 binary and analog outputs</li> <li>■ 1 input for an external temperature sensor</li> <li>■ KNX Secure</li> </ul>



## KNX outdoor sensors

 <p>LS 20.00 knx LS 30.00 knx</p>	<p>■ <b>müller</b></p> <p>Light / brightness sensor</p> <p>Light / brightness &amp; temperature sensor</p>	<ul style="list-style-type: none"> <li>■ Wall mounting (IP54)</li> <li>■ Lighting control / Lighting and temperature control</li> <li>■ Twilight switch with daily program</li> <li>■ Daily time switch</li> <li>■ Compact housing</li> </ul>
---	--	---



# KNX audio interface

	<p>■ <b>müller</b> AS 10.00 knx</p> <p>Buzzer</p>	<ul style="list-style-type: none"> <li>■ Wall mounting / fits in common switch range [55 mm] / outdoor installation</li> <li>■ Compact housing</li> <li>■ 3 volume levels</li> <li>■ Adjustable sequence</li> </ul>
	<p>■ <b>müller</b> AS 26.01 knx AS 26.11 knx</p> <p>Melody interface without loudspeaker Melody interface with loudspeaker (LA 06.10)</p>	<ul style="list-style-type: none"> <li>■ Flush-mounted fitting</li> <li>■ 12 melodies selectable</li> <li>■ Adjustable sound level</li> <li>■ External loudspeaker</li> <li>■ 1 binary input</li> </ul>
	<p>■ <b>müller</b> AS 36.03 knx AS 36.13 knx</p> <p>Audio interface without loudspeaker Audio interface with loudspeaker (LA 06.10)</p>	<ul style="list-style-type: none"> <li>■ Flush-mounted fitting</li> <li>■ 6 individual MP3-files, 12 pre-defined melodies</li> <li>■ Adjustable sound level</li> <li>■ External loudspeaker</li> <li>■ 3 binary inputs</li> </ul>




## Further KNX-TP products

	<p>■ <b>müller</b> EA 36.32 knx</p> <p>Universal interface with 3 inputs, 2 outputs &amp; integrated room temperature controller</p>	<ul style="list-style-type: none"> <li>■ Universal interface for building automation KNX</li> <li>■ Flush-mounted fitting</li> <li>■ 3 configurable inputs</li> <li>■ 2 binary outputs (LED / open collector)</li> <li>■ Integrated room temperature controller</li> <li>■ External temperature sensor available</li> </ul>
	<p>■ <b>müller</b> SC 98.40 knx</p> <p>Digital yearly time switch 4 channels</p>	<ul style="list-style-type: none"> <li>■ Yearly time switch for building automation KNX</li> <li>■ DIN-rail mounting 70 mm</li> <li>■ 4 channels / 300 memory locations</li> <li>■ PC-programmable</li> <li>■ Data key function</li> <li>■ DCF / GPS function</li> </ul>




## KNX-RF switching actuators

	<p><b>paladin</b> 683 730 rfs</p> <p>Switching actuator 1 channel</p>	<ul style="list-style-type: none"> <li>Switching actuator 1 channel</li> <li>Flush-mounted fitting</li> <li>Switching capacity: 16 A / 250 V</li> <li>Functions: switch, timer, staircase lighting timer</li> <li>KNX-RF 1.R S-Mode</li> </ul>
	<p><b>paladin</b> 683 732 rfs</p> <p>Switching actuator / shutter actuator 2 channels</p>	<ul style="list-style-type: none"> <li>Switching actuator 2 channel / shutter actuator</li> <li>Flush-mounted fitting</li> <li>Switching capacity: 16 A / 250 V</li> <li>Functions: shutter- / blind control</li> <li>External pushbutton input</li> <li>KNX-RF 1.R S-Mode</li> </ul>

## KNX-RF dimmers

	<p><b>paladin</b> 683 830 rfs</p> <p>for RLC / LED loads</p>	<ul style="list-style-type: none"> <li>RLC / LED dimmer</li> <li>Flush-mounted fitting</li> <li>Load 4 - 250 W</li> <li>Leading- / trailing edge dimming</li> <li>Additional connection for wired push-buttons</li> <li>KNX-RF 1.R S-Mode</li> </ul>
	<p><b>paladin</b> 683 831 rfs</p> <p>for LED-strips</p>	<ul style="list-style-type: none"> <li>LED-strip dimmer</li> <li>Flush-mounted fitting</li> <li>LED strips up to 8 A</li> <li>LED strips 12 - 48 V DC</li> <li>Pulse width modulation (PWM)</li> <li>KNX-RF 1.R S-Mode</li> </ul>
	<p><b>paladin</b> 683 834 rfs</p> <p>for DALI ballasts</p>	<ul style="list-style-type: none"> <li>DALI dimmer / gateway</li> <li>Flush-mounted fitting</li> <li>1 channel / 1 group</li> <li>Up to 64 drivers can be controlled</li> <li>Broadcasting communication</li> <li>KNX-RF 1.R S-Mode</li> </ul>





## KNX-RF sensors and transmitters

	<p><b>paladin</b> 683 010 rfs</p> <p>Pushbutton interface</p>	<ul style="list-style-type: none"> <li>Wireless pushbutton interface</li> <li>Build-in temperature sensor</li> <li>Flush-mounted fitting</li> <li>Input for max. 2 wired pushbuttons</li> <li>Battery operated (battery lifetime approx. 8 years)</li> <li>KNX-RF 1.R S-Mode</li> </ul>
	<p><b>paladin</b> 686 312 rfs</p> <p>Multi sensor</p>	<ul style="list-style-type: none"> <li>Wireless sensor</li> <li>Temperature, light and humidity</li> <li>Wall mounting</li> <li>Transmission of sensor values via RF</li> <li>Battery operated (battery lifetime approx. 8 years)</li> <li>KNX-RF 1.R S-Mode</li> </ul>
	<p><b>paladin</b> 686 410 rfs</p> <p>Door- / window contact sensor</p>	<ul style="list-style-type: none"> <li>Door- / window contact sensor</li> <li>Wall mounting</li> <li>Transmission of open / close status via RF</li> <li>Battery operated (battery lifetime approx. 12 years)</li> <li>KNX-RF 1.R S-Mode</li> </ul>

# Accessories

	<p>■ <b>müller</b> LA 06.10</p> <p>Loudspeaker mini</p>	<ul style="list-style-type: none"> <li>■ Mini Loudspeaker for flush-mounting</li> <li>■ Nominal Impedance: 8 ohm</li> <li>■ Suitable for: AS 26.01 knx and AS 36.03 knx</li> </ul>
	<p>■ <b>müller</b> LA 16.10</p> <p>Loudspeaker</p>	<ul style="list-style-type: none"> <li>■ Loudspeaker for flush-mounting</li> <li>■ Nominal Impedance: 6 ohm</li> <li>■ Suitable for: AS 26.01 knx and AS 36.03 knx</li> </ul>
	<p>■ <b>müller</b> TF 06</p> <p>sensor / probe 4 m</p> <p>TF 16</p> <p>sensor / probe 20 cm</p>	<ul style="list-style-type: none"> <li>■ External temperature sensor</li> <li>■ Measuring range: -15...+70°C</li> <li>■ Cable length: 4 m / 20 cm</li> <li>■ Suitable for: EA 36.32 knx, TS 3x.10 knx, TS 3x.11 knx, GS 3x.10 knx, GS 3x.11 knx, GS 4x.10 knx, GS 4x.11 knx</li> </ul>
	<p>■ <b>paladin</b> 683 520 rfs S</p> <p>Gateway KNX RF / TP</p>	<ul style="list-style-type: none"> <li>■ Gateway KNX RF / TP</li> <li>■ Flush-mounted fitting</li> <li>■ RF-repeater function</li> <li>■ KNX-RF 1.R S-Mode</li> <li>■ KNX Secure</li> </ul>

# Mounting accessories

	<p>Mounting plate for wall box suitable for 55 x 55 mm switch design products</p> <p>Order number 200.001</p>		<p>Mounting angle for outdoor installation IP X4 suitable for 55 x 55 mm wall mounting products</p> <p>Order number 200.002</p>
	<p>Vaccum cup suitable for 55 x 55 mm wall mounting products</p> <p>Order number 200.003</p>		<p>Back part for surface wiring suitable for 80 x 80 mm wall mounting products</p> <p>Order number 200.004</p>







 **müller**

2026

[www.hugo-mueller.de](http://www.hugo-mueller.de)

**Imprint**

**Publisher:**  
Hugo Müller GmbH & Co KG  
Karlstraße 90 | 78054 VS-Schwenningen  
P +49 7720 8083-6 | E [hugo-mueller@info.de](mailto:hugo-mueller@info.de)

Register court: Amtsgericht Freiburg,  
HRA 602774 | USt-IdNr. DE814246781  
Vertretungsberechtigte Geschäftsführer:  
Dr. Alexander Müller, Annette Müller

Further product information, manuals  
and product images as well as our general  
terms and conditions can be found at  
[hugo-mueller.de](http://hugo-mueller.de)





Hugo Müller GmbH & Co KG  
Karlstraße 90  
D-78054 VS-Schwenningen  
P +49 (0) 7720 / 80836  
E [info@hugo-mueller.de](mailto:info@hugo-mueller.de)  
[www.hugo-mueller.de](http://www.hugo-mueller.de)

