

MASTERCLOCKS

müller SC 98.47 pro



Accessories



DK pro



PP 50.00 pro



müller FU 20.00 pro



müller FU 3x.00 pro

Overview

- For approx. 40 slave clocks (24 V DC, 300 mA, pole changing pulse)
- Short-circuit proof
- Automatic adjustment of the slave clocks
- Automatic time correction of slave clock/s after supply voltage interruption
- Repetition of the last applied minutepulse
- Fully automatic summertime change (European standard) with 60 additional pulses or 1 hour pulse suppression of the slave-clock-line
- Monitoring of the slave-clock-line and malfunction indicator in display
- Security by PIN-Code
- Illuminated display
- Data-key function
- DCF / GPS function

Overview time switch function

- 4 channels (change-over)
- Daily, weekly and yearly program
- 300 memory locations
- Minimum interval 1 min
- Permanent by date
- Manual override
- Elapsed time and pulse counter
- Pulse function
- Cycle function
- Timer function
- Channel button function
- DCF / GPS function
- External input function
- Data-key function

Highlights

- Yearly program within Easter function, Weekday function and Extra-switching-time function
- Text based Menu
- Display with a large dot matrix area to provide two high resolution text lines
- Easy handling
- Quick and intuitive programmable
- 10 years battery-reserve
- Unlimited program security by E²-PROM

Intended use

- The device fits for the particular use of the following tasks: Regulation of slave clocks in schools, sports halls, hospitals, factories and companies or huge buildings as well as for church clocks.
- Operate the device in a dry room only!
- The installation must be in accordance with the instruction manual.

Order numbers

■ müller	
SC 98.47 pro	1 Slaveclock line 4 channels

MASTERCLOCKS

müller SC 98.47 pro

Order information



	Voltage	EAN	Art. No.
SC 98.47 pro	230 V 50-60 Hz	4022709216236	21623

Technical data master clock unit

Output voltage	24 V DC
Output current	300 mA
Max. number slave clocks	approx. 40 slave clocks à 7 mA
Output signal	Pole changing pulse
Pulse sequence	Normal operation 1/min. during adjustment = 10/Min.
Pulse length	ca. 2 Sec. (adjustable)

Technical data

Supply voltage	230 V, 50-60 Hz
Power consumption (real power)	Time switch: 1,3 -3,5 W (depending on the switching status) Master clock: 2,0 - 4,6 W (depends on the installed slave clocks)
Channels (potential-free)	Change-over, contact gap < 3 mm (µ)
Contact material	AgSnO ₂
Switching capacity per channel	
resistive load:	16 A / 250 V~ at cosφ=1
inductive load:	10 A at cosφ=0,6
Min. switching power	1.000 mW (10 V / 10 mA)
Max. starting current	50 A
Filament Lamp, Halogen Lamp	2.000 W
Fluorescent Lamp uncompensated	1.000 VA
Fluorescent Lamp series compensated	1.000 VA
Fluorescent Lamp parallel compensated	550 VA
LED (230 V~) / CFL	200 W
Switching functions:	ON OFF pulse cycle yearly program
Pulse length	00:01 up to 59:59 mm:ss
Pulse length Timer (man. switching)	0:00:01 up to 9:59:59 h:mm:ss
Pulse/Pause length Cycle	0:00:01 up to 9:59:59 h:mm:ss
Memory locations	300
Minimum interval	1 Min.
Time base	Quartz DCF (FU 20.00 pro) GPS (FU 3x.00 pro)
Quartz accuracy (at 20 °C)	≤±0,5 Sec./day (Quartz accuracy optimized for typical ambient conditions)
Power back-up (at 20 °C)	approx. 10 years (depends on the Lithium-battery life)
Program security	unlimited (E ₂ -Prom)
Display	high resolution LCD (visible area 12,8 cm ²)
Permitted ambient temperature	-30...+50 °C
Housing	self-extinguishing thermoplastic
Dimensions	45 x 143 x 58 mm
Mounting	35 mm DIN-rail
Type of connection	Screw terminals (Pull-up type)
Type of protection	IP 20 to DIN EN 60529
Class of protection	II when installed according to regulations
Mode of operation (DIN EN 60730-1)	1 BSTU
(DIN EN 60730-2-7)	
Degree of contamination (DIN EN 60730-1)	2
Rated surge voltage (DIN EN 60730-1)	4 kV
Accessories (not included in delivery)	Data-key DK pro Programming package PP 50 pro Programming package PP 60 pro Radio receiver FU 20.00 pro Radio receiver FU 3x.00 pro Mini terminal box 8PLE

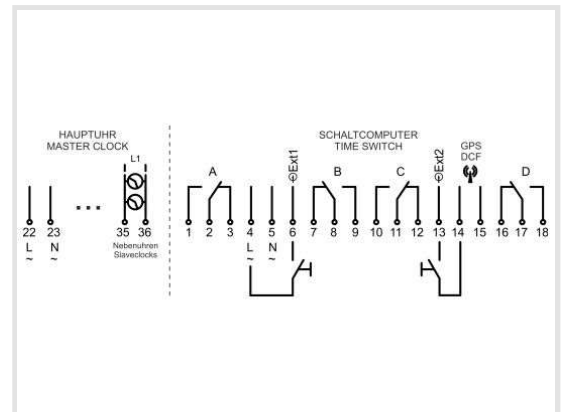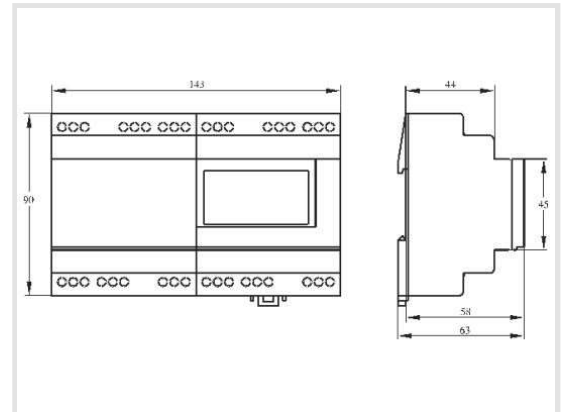

Rights to technical amendments reserved / Technische Änderungen vorbehalten
Droits de modifications techniques réservés / Suscettibile di errori e modifiche